
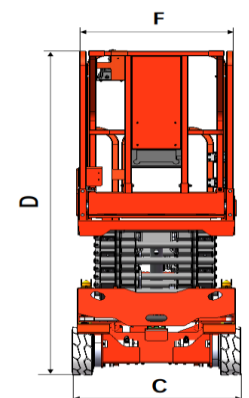
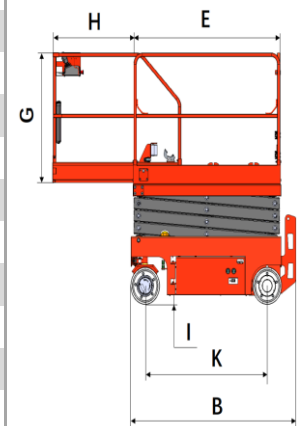


# JS07N Self Propelled ScissorType

Aerial Work Platform complys with GB25849 and EN280 standards

# HELI

		JS0407NE	JS0407NELi
<b>Dimension</b>			
A1 Max.working height	m	6.1	6.1
A2 Max.platform height	m	4.1	4.1
B Overall length	m	1.45	1.45
C Overall width	m	0.76	0.76
D Overall height(guardrail unfolded)	m	2.03	2.03
Hight stowed-rails folded	m	/	/
Platfor Size(length X width)(EXF)	m	1.28×0.74	1.28×0.74
Guardrail hight(G)	m	1.1	1.1
H Extension size of platform	m	0.6	0.6
I Ground clearance(retracted state)	mm	65	65
J Ground clearance(lifting state)	mm	20	20
K Wheelbase	m	1.03	1.03
<b>Performance</b>			
Max.number of workers(indoor/outdoor)		2 / -	2 / -
Rated capacity	kg	230	230
Rated capacity of extension platform	kg	100	100
Drive speed(retracted state)	km/h	0~4	0~4
Drive speed(lifting state)	km/h	0~0.8	0~0.8
Min.turning radius(inside)	m	0.025	0.025
Min.turning radius(outside)	m	1.4	1.4
Lifting/Falling time	s	25/35	25/35
Max.work slop(forward and backward/left and right)	°	3°/1.5°	3°/1.5°
Max.allowable wind speed(indoor/outdoor)	m/s	0/0	0/0
Max.allowable wind speed(indoor/outdoor)	N	400/0	400/0
Gradeability	%	25	25
Controls type		Proportional control	Proportional control
Drive		Dual fornt wheels	Dual fornt wheels
Brake		Dual fornt wheels	Dual fornt wheels
tyres size	mm	230×80	230×80
<b>Power</b>			
Lifting/driving motor power	kw	24VDC/2x0.45kw	24VDC/2x0.45kw
Battrey voltage/capacity	V/Ah	2x12/100	25.6/84
Charger input voltage	VAC	100-240	100-240
Charger output current	A	15	15
Controls voltage	VDC	24	24
Hydraulic system capacity	L	4	4
Overall weight	kg	960	960

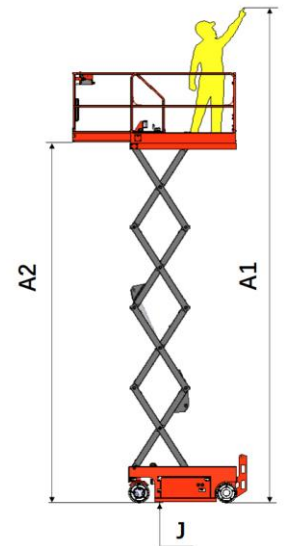

Our products are subject to improvements and changes without notice

