



JX12J Horizontal Order Picker



	Characteristics		
1.1	Manufacturer		HELI
1.2	Model	* · · · · · · · · · · · · · · · · · · ·	JX12J
1.3	Operator type		Stand On
1.4	Rated capacity	Q (kg)	1200
1.5	Lift height	h3 (mm)	700
1.6	Service weight with battery	kg	1070
1.7	Load centre	c (mm)	600
1.8	Axle centre to fork face	x (mm)	675
9	Wheel base	y (mm)	1875
10	Controller		CURTIS
	Wheels		
2.1	Tyre type		Polyurethane
2.2	Tyre size, Driving wheel	Φ×w(mm)	Ф250×75
2.3	Tyre size, Loading wheel	Φ×w(mm)	Ф80×70
2.4	Additional wheels (dimensions)	Φ×w(mm)	Φ115×55
2.5	Wheels, number front/rear (x = driven)		1x+2/4
2.6	Track width,rear,loading side	b11 (mm)	390/515
	Dimensions		
3.1	Overall length	l1 (mm)	2551
3.2	Length to fork face	l2 (mm)	1400
3.3	Overall width	b1 (mm)	808
3.4	Overall height	h1 (mm)	1253
3.5	Fork dimensions	s/e/l (mm)	60/180/1150
3.6	Width of forks	b5 (mm)	695/570
3.7	Lowered height	h13 (mm)	86
3.8	Min.Ground clearance	m2 (mm)	26
3.9	height drawbar in driving position	h14 (mm)	1090
.10	Aisle width with pallet 1000 x 1200 across forks	Ast (mm)	2960
3.11	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	2940
3.12	Min.Turning radius	Wa (mm)	2076
	Performance		
4.1	Travel spees, with/without load	(km/h)	5.2/5.5
1.2	Lifting speed, with/without load	(mm/s)	95/160
1.3	Lowering speed, with/without load	(mm/s)	130/120
1.4	Max. gradeability laden/unladen	(%)	3/6
4.5	Service brake type		Electromagnetic brake
	Drive and Battery		
.1	Drive motor,output S2 60 min.	(kW)	1.5 (AC)
.2	Lift motor rating at S3 15%	(kW)	2.2 (DC)
.3	Battery according to DIN 43531/35/36 A,B,C,no	1 2	no
.4	Battery voltage/rated capacity	(V/Ah)	24/360
5.5	Battery weight (± 5%)	(kg)	310
	Others		
6.1	Type of drive control		AC
6.2	Sound pressure level at driver 's ear	(dB(A))	≤75
6.3	Steering type		Electronic steering

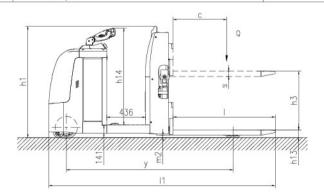

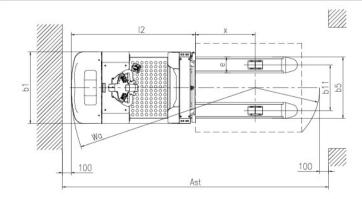







HELI CANADA 5705, place Kubota Drummondville (Qc) Canada, J2B 6V4 1-833-HELICAN info@heliforklift.ca heliforklift.ca

